

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 0 829 312 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
18.03.1998 Bulletin 1998/12

(51) Int Cl.⁶: B08B 3/08, H01L 21/306

(21) Application number: 97305628.6

(22) Date of filing: 25.07.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(72) Inventors:
• Douglas, Monte A.
Coppell, Texas 75019 (US)
• Templeton, Allen C.
Paris, Texas 75462 (US)

(30) Priority: 25.07.1996 US 22811 P

(71) Applicant: TEXAS INSTRUMENTS
INCORPORATED
Dallas Texas 75265 (US)

(74) Representative: Darby, David Thomas et al
Abel & Imray
Northumberland House
303-306 High Holborn
London WC1V 7LH (GB)

(54) Improvements in or relating to semiconductor devices

(57) An embodiment of the instant invention is a method of removing inorganic contamination from substantially the surface of a semiconductor substrate, the method comprising the steps of: reacting the inorganic contamination with at least one conversion agent, thereby converting the inorganic contamination; removing the

converted inorganic contamination by subjecting it to at least one solvent agent, the solvent agent is included in a first supercritical fluid (preferably supercritical CO₂); and wherein the converted inorganic contamination is more highly soluble in the solvent agent than the inorganic contamination.

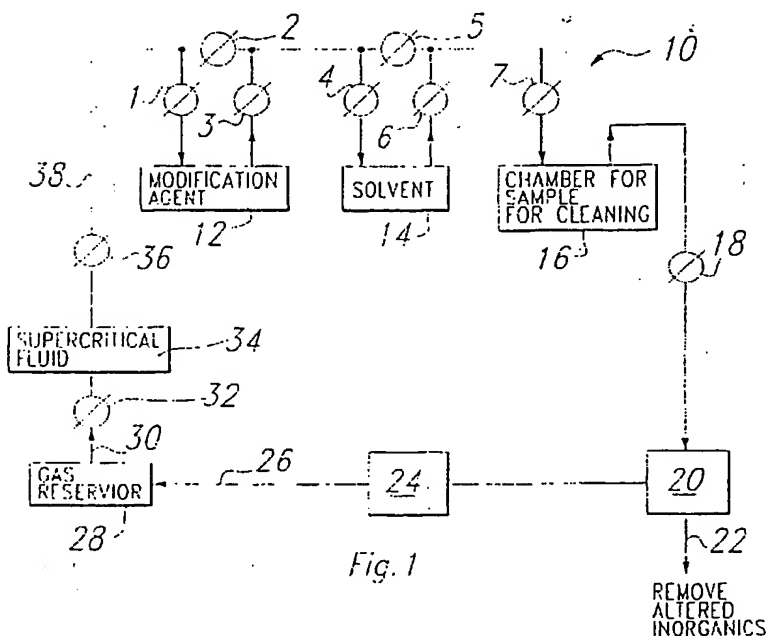


Fig. 1

D scription

The instant invention pertains to semiconductor device fabrication and processing and more specifically to the removal of inorganic contamination at the surface of a semiconductor structure.

BACKGROUND OF THE INVENTION

In the manufacture of, for example, integrated circuits and liquid crystal displays, contamination of the substrate and subsequent semiconductor layers causes many problems and should be reduced as much as possible. Examples of such contamination are residual particulates, organics, and metals. In addition, contaminants may be situated on the surface of the semiconductor layer, or they may be situated between the semiconductor layer and another layer (e.g. an oxide layer). Typically, wet-processing is utilized in the fabrication of semiconductor devices. A wet cleaning process may consist of a sequence of particle removal and metal removal steps, with a rinsing step performed between them, and concluding with a drying step. Drying is typically accomplished either by spinning the wafer so that the liquid on the wafer will be spun off or by raising the wafers from a cloud of hot isopropyl alcohol vapor which condenses on the surface of the wafer and displaces the water.

This type of wet cleaning process suffers from a particularly serious drawback, specifically, most metal removal processes of this type (typically consisting of strongly acidic mixtures) add particles to the surface of the wafer, and particle removal processes (typically comprised of basic/oxidant mixtures) add metals to the surface of the wafer. In addition, most wet cleaning processes suffer from the problems of: expense of obtaining electronic-grade wet chemicals; expense of disposing of the caustic chemicals which are used in wet cleaning processes; liquid surface tension limiting or preventing access of wet chemical cleaning to high aspect ratio features, like trenches; and lack of harmonization with all dry processing (which is utilized more frequently in semiconductor processing). Hence, a metal removal step followed by a particle removal step will result in residual metals, while the reverse process results in fewer particles but can become contaminated with metals by the final rinsing.

Supercritical fluids (namely, supercritical carbon dioxide) have received much attention, lately. This is especially true in the area's involving decaffeination of coffee and linen/fine clothing dry cleaning. In addition, supercritical CO₂ can be used in the removal of organic contaminants from semiconductor wafers. See International Journal of Environmentally Conscious Design & Manufacturing, Vol. 2, p. 83 (1993) (stating "supercritical carbon dioxide is best applied to the removal of organic compounds with mid-to-low volatilities"). However, supercritical CO₂ is generally regarded as ineffective in

cleaning inorganic contaminants (namely, metals) from semiconductor wafers.

Relating to another field, a group of researchers have discovered a way of removing metals from vegetation by subjecting the vegetation to supercritical CO₂ and neutralizing the metals with chelating agents. See Elizabeth K. Wilson, Toxic Metals Extracted with Supercritical Carbon Dioxide, C&EN 27 (April 15, 1996); and U.S. Patent No. 5,356,538. However, this work states that "by itself, nonpolar supercritical CO₂ is almost useless for solvating positively charged heavy-metal ions. However, researchers have discovered that metals can be solvated if they are first neutralized by chelating agents and, furthermore, that the solvency increases dramatically when the chelating agents are fluorinated." Id. at 27. However, there are several problems with this approach. First, there is a difficulty removing uncharged metals. Second, unfluorinated chelating agents are expensive. Third, mass scale synthesis of fluorinated chelating agents is expensive. Fourth, fluorinated and unfluorinated chelating agents are highly toxic and expensive to purify and dispose of. Fifth, there is a limited range of metals that can be readily solvated by the fluorinated chelating agents. Sixth, diffusion of unchelated metals into an underlying semiconductor substrate would be disastrous using the methodology of this publication.

It is, therefore, an object of the instant invention to provide a method of removing metal contaminants from semiconductor wafers. It is another object of the instant invention to provide a method of removing inorganic contaminants from semiconductor wafers.

SUMMARY OF THE INVENTION

In summary, one embodiment of the instant invention is a method which overcomes the problems involved with chemical modification of the ionic and neutral, light and heavy inorganic (metal) species and which renders these ionic and neutral, light and heavy inorganic (metal) species soluble upon exposure to conventional, inexpensive, high purity, nontoxic solvents. The method of the instant invention includes the steps of chemically altering the metal (inorganic) contaminants on the surface of the native oxide (which overlies the semiconductor substrate). This is preferably accomplished using a very broad spectrum of modification agents/chemicals, and the metal alteration may occur before or during exposure to a supercritical fluid (preferably CO₂). Next, the chemically-altered metal is exposed to a conventional solvent incorporated within a supercritical CO₂ fluid. Finally, the conventionally-solvated, chemically-altered metal is removed in the supercritical CO₂ medium. Key aspects of this invention are that the inorganic contaminant is not soluble in the supercritical CO₂ fluid without prior chemical alteration, and the chemically-altered inorganic contaminant may be removed by the solvent simultaneously with the

chemical alteration step.

An embodiment of the instant invention is a method of removing inorganic contamination from substantially the surface of a semiconductor substrate, the method comprising the steps of: reacting the inorganic contamination with at least one conversion agent, thereby converting the inorganic contamination; removing the converted inorganic contamination by subjecting it to at least one solvent agent, the solvent agent is included in a first supercritical fluid (preferably supercritical CO₂); and wherein the converted inorganic contamination is more highly soluble in the solvent agent than the inorganic contamination. Preferably, the conversion agent is selected from the group consisting of: an acid agent, a basic agent, a chelating agent, a ligand agent, a halogen-containing agent, and any combination thereof. Preferably, the inorganic contamination is situated on substantially the surface of a native oxide which overlies the substrate, and it may consist of metal contamination. The conversion agent may be included in a second supercritical fluid, which is preferably supercritical CO₂. The steps of reacting the inorganic contamination with at least one conversion agent and removing the converted inorganic contamination by subjecting it to at least one solvent agent may be performed simultaneously or sequentially. Preferably, the solvent agent is selected from the group consisting of: a polar gas, a nonpolar gas, a polar supercritical fluid, a nonpolar supercritical fluid, a polar species, a nonpolar species, a surfactants, a detergent, a amphoteric material, or a chelating agent.

Another embodiment of the instant invention is a method of removing metallic contamination from substantially the surface of a semiconductor substrate, the method comprising the steps of: reacting the metallic contamination with at least one conversion agent thereby converting the metallic contamination, the conversion agent is included in a first supercritical CO₂ fluid; removing the converted metallic contamination by subjecting it to at least one solvent agent, the solvent agent is included in a second supercritical CO₂ fluid; and wherein the converted metallic contamination is more highly soluble in the solvent agent than the metallic contamination. The steps of reacting the metallic contamination with at least one conversion agent and removing the converted metallic contamination by subjecting it to at least one solvent agent may be performed simultaneously or sequentially.

BRIEF DESCRIPTION OF THE DRAWINGS

The present invention will now be further described, by way of example, with reference to the accompanying drawing in which:-

FIGURE 1 is a schematic drawing of a sample cleaning system in accordance with an embodiment of the instant invention.

DETAILED DESCRIPTION OF THE INSTANT INVENTION

FIGURE 1 illustrates a process system which can be utilized to implement the method of the instant invention. The sample to be cleaned (the semiconductor wafer with inorganic contamination present) is held in container 16. A supercritical fluid (preferably a CO₂ gas) is supplied from a gas reservoir 28 which is connected by a conduit 30, which includes valve 32, to a pressurization unit 34 that increases the pressure on the gas to greater than approximately 70 to 75 atmospheres at a temperature greater than approximately 32°C to form the supercritical fluid. The supercritical fluid (SCF) travels through valve 36 and conduit 38 to a reservoir 12 (as long as valves 1 and 3 are open and valve 2 is closed) that holds a solid, liquid, or gas modification agent(s). Possible modification agents are listed below. The passing of the SCF through the modification agent acts to incorporate the modification agent into the SCF. The SCF incorporated with the modification agent to leave reservoir 12 and enter container 16. The SCF mixture and inorganic contamination are introduced, resulting in the modification of the inorganic contamination.

Subsequent to or simultaneous with modification of the inorganic contamination on the semiconductor sample by the modification agent, the SCF travels through valve 36 and conduit 38 to reservoir 14 which holds a solid, liquid, or gaseous solvent agent(s). This is accomplished by closing valves 1, 3, and 5 and opening valves 2, 4, and 6. The passing of the SCF through the solvent agent acts to incorporate the solvent agent into the SCF. The SCF incorporated with the solvent agent leaves reservoir 14 and enters chamber 16. The SCF mixture and modified inorganic contamination are introduced, thereby resulting in the removal of the modified inorganic contamination from the surface of the sample (preferably a semiconductor wafer).

The modified inorganic contaminant and the CO₂ are removed and passed through depressurization valve 18 such that the inorganic contaminant precipitates in container 20. The CO₂ gas is then recycled by pump 24 through line 26 to reservoir 28. The inorganic contaminants can be removed via line 22.

One embodiment of the instant invention is a method of removing inorganic contamination (preferably metals) from the top monolayer of a conductive, semiconductor, or insulating layer. The "top monolayer" generally refers to the top 5µm of the layer, and the layer is generally comprised of an oxide (probably a native oxide layer).

In general, this embodiment of the instant invention is a method to remove inorganic contamination, including metals, from substrate surfaces or the surface of a native oxide, grown on the substrate, by chemical conversion of the inorganic material to a different material that has higher solubility in a solvent for subsequent removal by the solvent in a supercritical fluid (preferably

supercritical CO₂). More specifically, the method of this embodiment would preferably comprise the steps of: reacting the inorganic contamination with a conversion agent; and removing the converted inorganic contamination product with a solvent (which is preferably completely or partially contained within a supercritical fluid, such as CO₂). The conversion agent may be an acid (preferably KCN, HF, HCl, or KI), a base (preferably NH₄OH, KOH, or NF₃), a chelating and/or ligand agent (preferably dibetaketone), or a halogen-containing agent (preferably CO, HN₃, NO, COS, HN₄OH, water, or H₂O₂). The conversion agent may be introduced to the semiconductor wafer by vapor exposure, plasma exposure, or incorporating the conversion agent in a supercritical fluid (preferably CO₂) and exposing the wafer to this combination. The solvent may be comprised of a polar gas (preferably CO, COS, NO, NH₃, or NF₃), nonpolar gases (preferably N₂, H₂, O₂, or F₂), polar SCF (preferably NO₂), nonpolar SCF (preferably CO₂), a polar species (preferably water, ethanol, methanol, acetone, or glycol), a nonpolar species (preferably tetrahydrofuran, or dimethylformamide), surfactants, detergents, or amphoteric materials (preferably sodium dodecyl sulfate, quaternary ammonium salts, or cationic, anionic, nonionic or zwitterionic surfactants), or a chelating agent (preferably beta-diketone, fluorinated or unfluorinated crown ether).

Although specific embodiments of the present invention are herein described, they are not to be construed as limiting the scope of the invention. Many embodiments of the present invention will become apparent to those skilled in the art in light of methodology of the specification.

Claims

1. A method of removing inorganic contamination from substantially the surface of a semiconductor substrate, said method comprising the steps of:
 - reacting said inorganic contamination with at least one conversion agent, thereby converting said inorganic contamination;
 - removing said converted inorganic contamination by subjecting it to at least one solvent agent, said solvent agent being included in a first supercritical fluid;
 - and wherein said converted inorganic contamination is more highly soluble in the solvent agent than said inorganic contamination.
2. The method of Claim 1, further comprising selecting said conversion agent from a group consisting of: an acid agent, a basic agent, a chelating agent, a ligand agent, a halogen-containing agent, and any combination thereof.
3. The method of Claim 1 or Claim 2, wherein said removing step comprises subjecting said converted inorganic solvent to a first supercritical fluid comprising supercritical CO₂.
4. The method of any of Claims 1 to 3, further comprising reacting an inorganic contamination situated on substantially the surface of a native oxide which overlies said substrate.
5. The method of Claim 1, Claim 3 or Claim 4, further comprising selecting a conversion agent included in a second supercritical fluid.
6. The method of Claim 5, wherein said step of selecting said second supercritical fluid comprises selecting supercritical CO₂.
7. The method of any preceding claim, wherein said steps of reacting said inorganic contamination with at least one conversion agent and removing said converted inorganic contamination by subjecting it to at least one solvent agent are performed simultaneously.
8. The method of any preceding claim, wherein said removing step comprises subjecting said converted inorganic solvent to a solvent agent selected from a group consisting of: a polar gas, a nonpolar gas, a polar supercritical fluid, a nonpolar supercritical fluid, a polar species, a nonpolar species, a surfactants, a detergent, an amphoteric material, or a chelating agent.
9. The method of any preceding claim, wherein said step of reacting said inorganic contamination comprises reacting a metal contamination.
10. A method of removing metallic contamination from substantially the surface of a semiconductor substrate, said method comprising the steps of:
 - reacting said metallic contamination with at least one conversion agent thereby converting said metallic contamination, said conversion agent being included in a first supercritical CO₂ fluid;
 - removing said converted metallic contamination by subjecting it to at least one solvent agent, said solvent agent is included in a second supercritical CO₂ fluid;
 - and wherein said converted metallic contamination is more highly soluble in the solvent agent than said metallic contamination.
11. The method of Claim 10, wherein said steps of reacting said metallic contamination with at least one conversion agent and removing said converted me-

tallic contamination by subjecting it to at least one solvent agent are performed simultaneously.

5

10

15

20

25

30

35

40

45

50

55

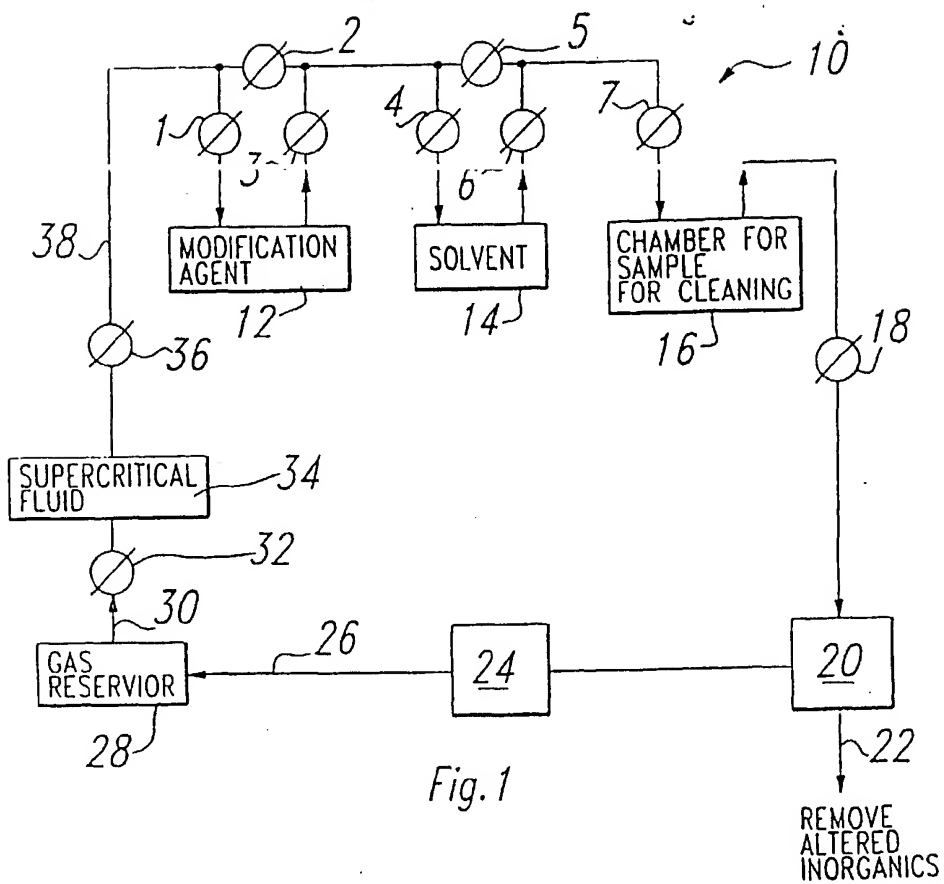


Fig. 1



(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
15.09.1999 Bulletin 1999/37

(51) Int. Cl.⁶: **B08B 7/00**, B08B 3/08,
H01L 21/306

(43) Date of publication A2:
18.03.1998 Bulletin 1998/12

(21) Application number: 97305628.6

(22) Date of filing: 25.07.1997

(84) Designated Contracting States:
AT BE CH DE DK ES FI FR GB GR IE IT LI LU MC
NL PT SE

(30) Priority: 25.07.1996 US 22811 P

(71) Applicant: **TEXAS INSTRUMENTS
INCORPORATED**
Dallas Texas 75265 (US)

(72) Inventors:

- **Douglas, Monte A.**
Coppell, Texas 75019 (US)
- **Templeton, Allen C.**
Paris, Texas 75462 (US)

(74) Representative: **Darby, David Thomas et al**
Abel & Imray,
20 Red Lion Street
London WC1R 4PQ (GB)

(54) Improvements in or relating to semiconductor devices

(57) An embodiment of the instant invention is a method of removing inorganic contamination from substantially the surface of a semiconductor substrate, the method comprising the steps of: reacting the inorganic contamination with at least one conversion agent, thereby converting the inorganic contamination; removing the

converted inorganic contamination by subjecting it to at least one solvent agent, the solvent agent is included in a first supercritical fluid (preferably supercritical CO₂); and wherein the converted inorganic contamination is more highly soluble in the solvent agent than the inorganic contamination.

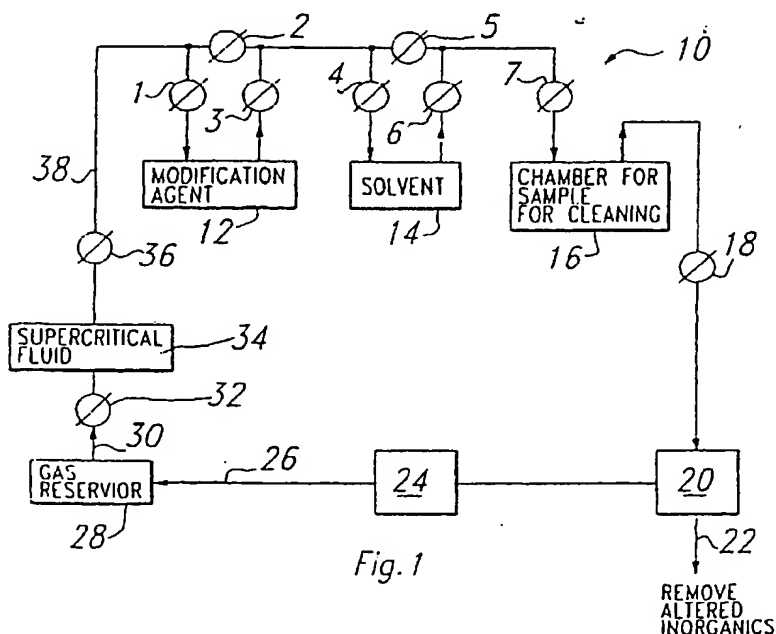


Fig. 1



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 97 30 5628

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	EP 0 391 035 A (HUGHES AIRCRAFT COMPANY) 10 October 1990 (1990-10-10) * abstract * * column 4, line 55 - column 5, line 28 * * column 8, line 43 - line 46 * * column 9, line 40 - column 10, line 12 * * column 10, line 43 - column 12, line 13; claims; figures *	1-8	B08B7/00 B08B3/08 H01L21/306
Y	---	9-11	
D, Y	US 5 356 538 A (WAI ET AL) 18 October 1994 (1994-10-18) * abstract * * column 6, line 21 - line 57 * * column 7, line 24 - line 42 * * example II * * figure 1 *	9-11	
A	---	1-4, 7, 8	
X	US 5 105 556 A (KUROKAWA ET AL) 21 April 1992 (1992-04-21) * column 5, line 32 - line 64; example 7 * * figures *	1-4, 7, 8	TECHNICAL FIELDS SEARCHED (Int.Cl.6) B08B H01L
X	PATENT ABSTRACTS OF JAPAN vol. 13, no. 507 (E-845), 14 November 1989 (1989-11-14) & JP 01 204427 A (HITACHI LTD), 17 August 1989 (1989-08-17) * abstract *	1-4, 7, 8	
A	---	10, 11	
A	US 5 352 327 A (WITOWSKI) 4 October 1994 (1994-10-04) * abstract *	9-11	
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 23 July 1999	Examiner Van der Zee, W
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03/82 (P/4C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 97 30 5628

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

23-07-1999

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0391035 A	10-10-1990	US 5068040 A	26-11-1991
		AT 108224 T	15-07-1994
		CA 2009748 A	03-10-1990
		DE 69010368 D	11-08-1994
		DE 69010368 T	03-11-1994
		DK 391035 T	01-08-1994
		JP 2770883 B	02-07-1998
		JP 3068139 A	25-03-1991
		US 5215592 A	01-06-1993
		US 5236602 A	17-08-1993
US 5356538 A	18-10-1994	US 5274129 A	28-12-1993
		US 5730874 A	24-03-1998
		US 5770085 A	23-06-1998
		US 5225173 A	06-07-1993
US 5105556 A	21-04-1992	JP 1045929 A	20-02-1989
		JP 1045125 A	17-02-1989
JP 01204427 A	17-08-1989	NONE	
US 5352327 A	04-10-1994	NONE	

THIS PAGE BLANK (USPTO)